




v² colibri Coin Validator

SETTING THE GLOBAL STANDARD FOR 3.5" COIN VALIDATORS

The v² colibri 3.5" coin validator offers best-in-class MFT (Multi-Frequency Technology) coin validation technology for the highest possible security. This versatile coin validator is ideal for use in applications with standard coin acceptance speed requirements, and several versions are available to suit your specific needs.

- Remote one-step download
- Superior MFT coin validation technology
- Reduce inventory due to modular build
- Retrofit ready with multiple interfaces
- Low total cost of ownership
- On-site tool for easy coin set updates
- Convenient maintenance

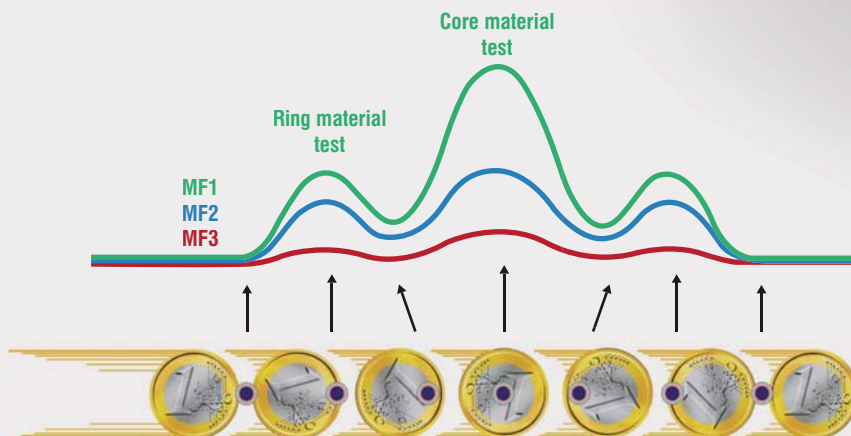

v² colibri Coin Validator Specifications & Benefits

v² colibri

Dimensions:

Height	89 mm
Width	102 mm
Depth	52 mm
Coin diameter	15 - 32.5 mm
Coin thickness	1.5 - 3.3 mm
Operating environment	0°C to +60°C (+32°F to +140°F) Inside host machine
Power supply voltage	12 - 24 Volts DC +/- 10%
Interface	Parallel, Serial: MDB, ccTalk, S1



KEY BENEFITS OF THE V² COLIBRI:

COIN PATH

- Global platform and modular construction reduces inventory requirements
- Option for front or top coin entry provides installation flexibility
- Optical monitoring of coin path provides additional security
- Interface for 3-way sorter allows more options for your system

COIN VALIDATION

- Patented Multi-Frequency Technology provides increased manipulation security
- Optical light barrier diameter measurement works with the MFT for superior validation
- Total of 24 measurements for each coin provides validation technology you can trust
- Block single or group coins to tailor the coin acceptance to your needs



CPI has made every effort to assure that the information in this document is accurate. However, we cannot be held responsible for any errors or omissions. © 2019 Crane Payment Innovations. All rights reserved.

www.cranepi.com/gaming